



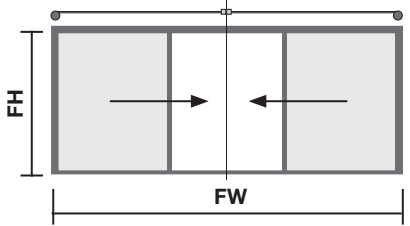
S2

Metric

FRAME SIZE LIMITS

Single | Double

centor®

Single - 70mm Jamb	Single - 25mm Jamb	Double
		

Sill (mm)	Frame Height (mm) (FH)	Frame Width (mm) (FW)		
19	756 - 2000	670 - 1370	625 - 1345	670 - 2550
	2001 - 3200	790 - 1370	745 - 1345	790 - 2550
25	763 - 2000	670 - 2070	625 - 2025	670 - 4000
	2001 - 3200	790 - 2070	745 - 2025	790 - 4000
	3201 - 3700	850 - 1345	805 - 1300	850 - 2550
	3701 - 4000	850 - 1020	805 - 975	850 - 1900

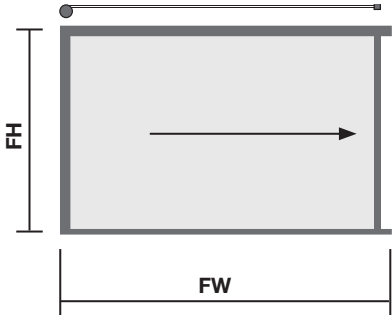
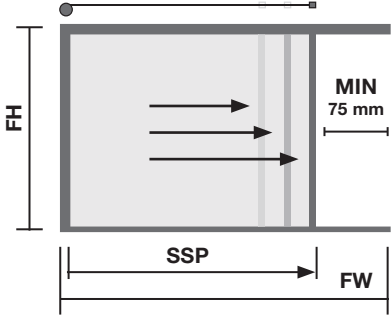
S2

Metric

FRAME SIZE LIMITS

Jambless

centor®

	Configuration	Sill (mm)	Frame Height (mm) (FH)	Frame Width (mm) (FW)	Screen Stop Position (SSP)
Jambless (Full width)		25	763 - 2000	603 - 2014	N/A
			2001 - 3200	653 - 2014	
			3201 - 3700	783 - 1289	
			3701 - 4000	783 - 964	
Jambless (Custom)		25	763 - 2000	603 - 3933	300 - 1930
			2001 - 3200	653 - 3933	300 - 1930
			3201 - 3700	723 - 3933	300 - 1205
			3701 - 4000	783 - 3933	300 - 880

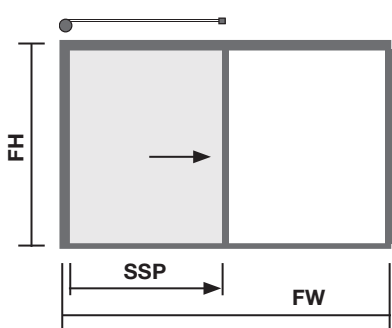
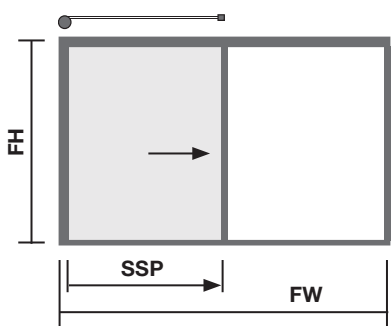
S2

Metric

FRAME SIZE LIMITS

XO or OX

centor®

	Configuration	Sill (mm)	Frame Height (mm) (FH)	Frame Width (mm) (FW)	Screen Stop Position (SSP)
XO or OX - 25mm Jamb		19	756 - 2000	625 - 2505	300 - 1930
			2001 - 3200	745 - 2505	300 - 1930
		25	763 - 2000	625 - 3955	300 - 1930
			2001 - 3200	745 - 3955	300 - 1930
			3201 - 3700	805 - 3955	300 - 1205
			3701 - 4000	805 - 3955	300 - 880
XO or OX - 70mm Jamb		19	756 - 2000	670 - 2550	300 - 1930
			2001 - 3200	790 - 2550	300 - 1930
		25	763 - 2000	670 - 4000	300 - 1930
			2001 - 3200	790 - 4000	300 - 1930
			3201 - 3700	850 - 4000	300 - 1205
			3701 - 4000	850 - 4000	300 - 880